LUXENTO

Architectural Downlights

Logo

The Logo range is a high performance renovation downlight targeting the replacement market for conventional CFL and halogen fixtures.
With its wide trim it covers most existing ceiling cut outs. The low height, two variations of fixture diameter and a wide range of luminous flux options make it possible to have the right solution for any downlight application.

WE BRING LIGHTING

TO THE NEXT LEVEL

Logo Medium Downlights

LUXENTO

Product code	CCT (k)	Power (W)	Luminous Flux	Dimensions Dø1 x H2
DL-150	3000K	10 W	1000 lm	150mm x 90mm
DL-150	4000K	10 W	1000 lm	150mm x 90mm
DL-150	3000K	20 W	2000 lm	150mm x 90mm
DL-150	4000K	20 W	2000 lm	150mm x 90mm
DL-210	3000K	10 W	1000 lm	210mm x 115mm
DL-210	4000K	10 W	1000 lm	210mm x 115mm
DL-210	3000K	20 W	2000 lm	210mm x 115mm
DL-210	4000K	20 W	2000 lm	210mm x 115mm



Led Technology	COB LED
Correlated Color Temperature CCT	3000K / 4000K
Beam Angle	40° - 80°
Color Rendering CRI	>80 (>90 optional)
Color Tolerance	<3 SDCM
UGR Value	na
Dimmable	Dali Optional
Voltage Vf	SELV
System Power	10 - 20 Watt (+/-10%)
Luminous lux Range	1000lm ~ 2000lm
Power Supply / Extrernal Driver	220Vac 50Hz
Protection Value Water / Dust	IP 44
Material	Aluminum
Operating Temperature	-20ºC /+ 40ºC
Expected Lifetime at 25°C	>50.000 hrs L80B20
Connection / Wiring	Push terminals on driver
Application	Recessed Mount Ceiling System

Logo Wallwasher

LUXENTO

Product code	CCT (k)	Power (W)	Luminous Flux	Dimensions Dø1 x H2
DL-210-WW	3000K	20 W	2000 lm	210mm x 90mm
DL-210-WW	4000K	20 W	2000 lm	210mm x 90mm
DL-210-WB	3000K	20 W	2000 lm	210mm x 90mm
DL-210-WB	4000K	20 W	2000 lm	210mm x 90mm

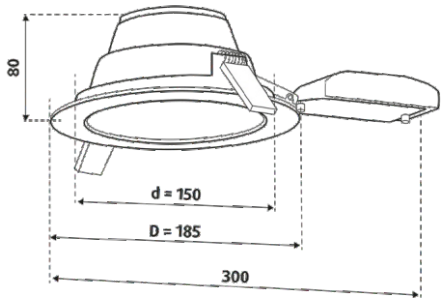

Led Technology	COB LED
Correlated Color Temperature CCT	3000K / 4000K
Beam Angle	40° - 80°
Color Rendering CRI	>80 (>90 optional)
Color Tolerance	<3 SDCM
UGR Value	na
Dimmable	Dali Optional
Voltage Vf	SELV
System Power	10 - 20 Watt (+/-10%)
Luminous lux Range	2000lm
Power Supply / Extrernal Driver	220Vac 50Hz
Protection Value Water / Dust	IP 44
Material	Aluminum
Operating Temperature	-20ºC /+ 40ºC
Expected Lifetime at 25°C	>50.000 hrs L80B20
Connection / Wiring	Push terminals on driver
Application	Recessed Mount Ceiling System

Logo Surface Downlights

LUXENTO

Product code	CCT (k)	Power (W)	Luminous Flux	Dimensions Dø1 x H2
DL-210-SFW	3000K	20 W	1000 lm	250mm x 190mm
DL-210-SFB	3000K	20 W	1000 lm	250mm x 190mm
DL-210-SFW	4000K	20 W	2000 lm	250mm x 190mm
DL-210-SFB	4000K	20 W	2000 lm	250mm x 190mm
DL-210-PDW	3000K	20 W	1000 lm	250mm x 190mm
DL-210-PDB	3000K	20 W	1000 lm	250mm x 190mm
DL-210-PDW	3000K	20 W	2000 lm	250mm x 190mm
DL-210-PDB	4000K	20 W	2000 lm	250mm x 190mm







Led Technology	COB LED
Correlated Color Temperature CCT	3000K / 4000K
Beam Angle	40° - 80º
Color Rendering CRI	>80 (>90 optional)
Color Tolerance	<3 SDCM
UGR Value	na
Dimmable	Dali Optional
Voltage Vf	SELV
System Power	20 Watt (+/-10%)
Luminous lux Range	2000lm
Power Supply / Extrernal Driver	220Vac 50Hz
Protection Value Water / Dust	IP 44
Material	Aluminum
Operating Temperature	-20ºC /+ 40ºC
Expected Lifetime at 25°C	>50.000 hrs L80B20
Connection / Wiring	Push terminals on driver
Application	Recessed Mount Ceiling System

Logo Wallwasher

LUXENTO

WE BRING LIGHTING

TO THE NEXT LEVEL

T +31 10 750 8880
www.inizio-cls.nl
info@inizio-cls.nl